


MEITAL PLUS 16 mm


Installation instructions

1

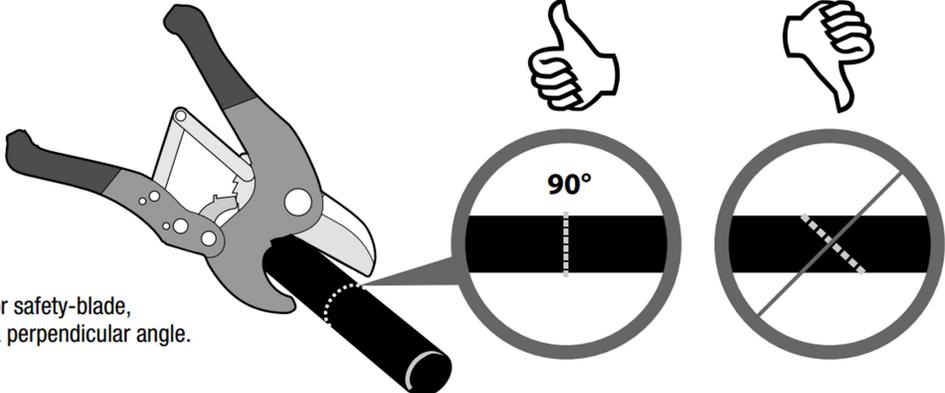

Using a pipe-cutter or safety-blade, cut the pipe wall at a perpendicular angle.

2

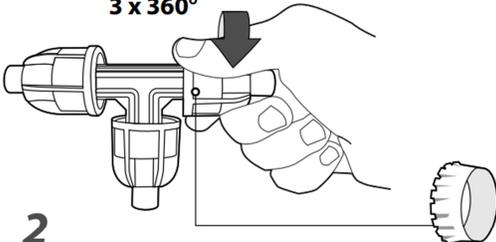


3 x 360°

Unscrew the fitting nut, until the base of the thread is visible (3 turns of 360°). See step 3 for example.


Compression ring inside to ensure tight connection

3

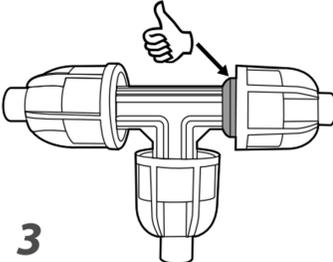


Insert the pipe all the way in

4

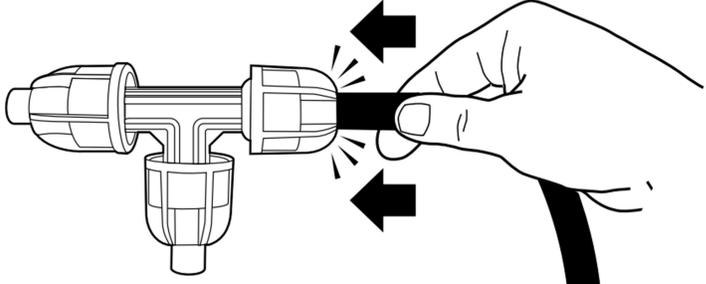


Re-tighten the fitting nut by hand until snug

5

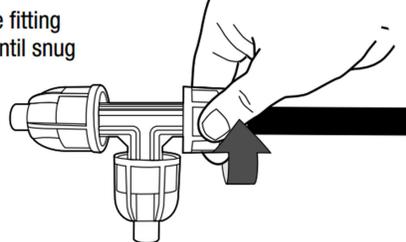

6

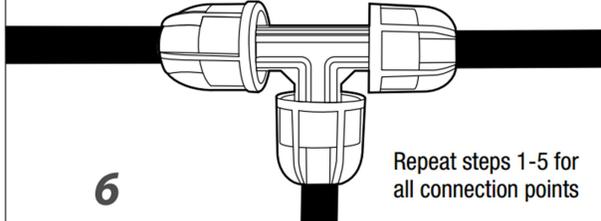

Repeat steps 1-5 for all connection points